

EVAPORADORES MURALES - SERIE MRB / MRL

PASO DE ALETAS: 7 mm.

R-404A

Modelo		MRB 650	MRB 1050	MRB 1450	MRB 2150	MRB 2950	MRB 3750	MRB 4100	MRB 5300	MRB 6400
Capacidad Tc=0°C ΔT ₁ = 8K (ENV 328 cond. 2) - W		12.704	19.744	23.312	34.968	45.464	57.960	68.248	87.048	102.792
Superficie	m ²	55	70	93	139	171	192	256	269	358
Volumen int.	dm ³	18	22	29	42	52	58	77	81	108
Caudal aire	m ³ /h	6.850	13.400	13.000	19.500	27.000	42.000	40.500	66.600	63.900
Proyección aire	m	17	20	19	21	32	34	33	36	36
Motovent. 400V/III/50Hz 1.350 r.p.m.	Nº x Ø	1 x 500	2 x 500	2 x 500	3 x 500	2 x 630	3 x 630	3 x 630	3 x 710	3 x 710
	A	1,35	2,70	2,70	4,05	6,20	9,30	9,30	24,60	24,60
	kW	0,78	1,56	1,56	2,34	3,70	5,55	5,55	12,00	12,00
Desescarche Eléctrico	Bandeja nº	2	2	2	2	2	2	2	2	2
	Batería nº	6	4	6	6	8	6	8	8	10
	Total	8	6	8	8	10	8	10	10	12
	Potencia W	8.000	10.200	13.600	20.400	20.000	24.000	30.000	30.000	36.000
Conexiones mm.	Entrada	16	22	22	22	28	28	28	2x28	2x28
	Salida	35	42	54	54	66	66	66	2x66	2x66
Peso neto	Kg.	125	170	188	265	295	370	418	543	610
Sin Desescarche	€	5.632	7.814	8.564	11.507	13.381	16.475	18.117	26.930	29.203
	Código	EV6375	EV6376	EV6377	EV6378	EV6379	EV6380	EV6381	EV6382	EV6383
Desescarche Eléctrico	€	6.080	8.260	9.123	12.179	14.145	17.257	19.089	27.902	30.337
	Código	EV6390	EV6391	EV6392	EV6393	EV6394	EV6395	EV6396	EV6397	EV6398

PASO DE ALETAS: 9 mm.

R-404A

Modelo		MRL 600	MRL 865	MRL 1160	MRL 1800	MRL 2550	MRL 3300	MRL 4000	MRL 5100	MRL 5900
Capacidad Tc=0°C ΔT ₁ = 8K (ENV 328 cond. 2) - W		11.760	18.064	21.424	32.128	42.208	52.816	63.208	76.886	94.608
Superficie	m ²	44	56	74	112	137	154	205	215	287
Volumen int.	dm ³	18	22	29	42	52	58	77	81	108
Caudal aire	m ³ /h	7.050	13.700	13.400	20.100	28.200	43.800	42.300	68.400	66.000
Proy. aire	m	18	21	20	22	33	35	34	37	37
Motovent. 400V/III/50Hz 1.350 r.p.m.	Nº x Ø	1 x 500	2 x 500	2 x 500	3 x 500	2 x 630	3 x 630	3 x 630	3 x 710	3 x 710
	A	1,35	2,70	2,70	4,05	6,20	9,30	9,30	24,60	24,60
	kW	0,78	1,56	1,56	2,34	3,70	5,55	5,55	12,00	12,00
Desescarche Eléctrico	Bandeja nº	2	2	2	2	2	2	2	2	2
	Batería nº	6	4	6	6	8	6	8	8	10
	Total	8	6	8	8	10	8	10	10	12
	Potencia W	8.000	10.200	13.600	20.400	20.000	24.000	30.000	30.000	36.000
Conexiones mm.	Entrada	16	22	22	22	28	28	28	2x28	2x28
	Salida	35	42	54	54	66	66	66	2x66	2x66
Peso neto	Kg.	121	165	182	256	284	357	401	525	586
Sin Desescarche	€	5.594	7.765	8.505	11.416	13.268	16.351	17.950	26.752	28.966
	Código	EV6405	EV6406	EV6407	EV6408	EV6409	EV6410	EV6411	EV6412	EV6413
Desescarche Eléctrico	€	6.043	8.211	9.063	12.087	14.031	17.133	18.922	27.724	30.100
	Código	EV6415	EV6416	EV6417	EV6418	EV6419	EV6420	EV6421	EV6422	EV6423

La capacidad indicada corresponde a la potencia sensible del evaporador (superficie seca).



EVAPORADORES MURALES - SERIE MRX

PASO DE ALETAS: 12 mm.

R-404A


Modelo		MRX 520	MRX 710	MRX 960	MRX 1300	MRX 1720	MRX 2300	MRX 2850	MRX 3450	MRX 4850
Capacidad Tc=0°C ΔT ₁ = 8K (ENV 328 cond. 2) - W		8.400	12.072	14.912	22.368	30.032	36.328	45.048	53.968	67.096
Superficie	m ²	38	49	65	98	128	144	192	202	269
Volumen int.	dm ³	21	25	34	50	66	73	97	102	136
Caudal aire	m ³ /h	7.500	14.600	14.000	21.000	28.600	44.250	42.900	70.500	68.100
Proyección aire	m	18	21	20	22	33	35	34	37	37
Motovent. 400V/III/50Hz 1.350 r.p.m.	Nº x Ø	1 x 500	2 x 500	2 x 500	3 x 500	2 x 630	3 x 630	3 x 630	3 x 710	3 x 710
	A	1,35	2,70	2,70	4,05	6,20	9,30	9,30	24,60	24,60
	kW	0,78	1,56	1,56	2,34	3,70	5,55	5,55	12,00	12,00
Desescarche Eléctrico	Bandeja nº	2	2	2	2	2	2	2	2	2
	Batería nº	6	4	6	6	8	6	8	8	10
	Total	8	6	8	8	10	8	10	10	12
	Potencia W	8.000	10.200	13.600	20.400	20.000	24.000	30.000	30.000	36.000
Conexiones mm.	Entrada	16	16	16	16	22	22	22	2x28	2x28
	Salida	35	35	42	42	66	66	66	2x66	2x66
Peso neto	Kg.	122	166	183	251	289	363	409	533	597
Sin Desescarche	€	5.427	7.538	8.208	10.962	12.933	15.952	17.426	26.179	28.226
	Código	EV6425	EV6426	EV6427	EV6428	EV6429	EV6430	EV6431	EV6432	EV6433
Desescarche Eléctrico	€	5.875	7.984	8.766	11.634	13.697	16.734	18.398	27.151	29.360
	Código	EV6435	EV6436	EV6437	EV6438	EV6439	EV6440	EV6441	EV6442	EV6443

La capacidad indicada corresponde a la potencia sensible del evaporador (superficie seca).



EVAPORADORES MURALES - SERIE MR - DIMENSIONES

Ø 500

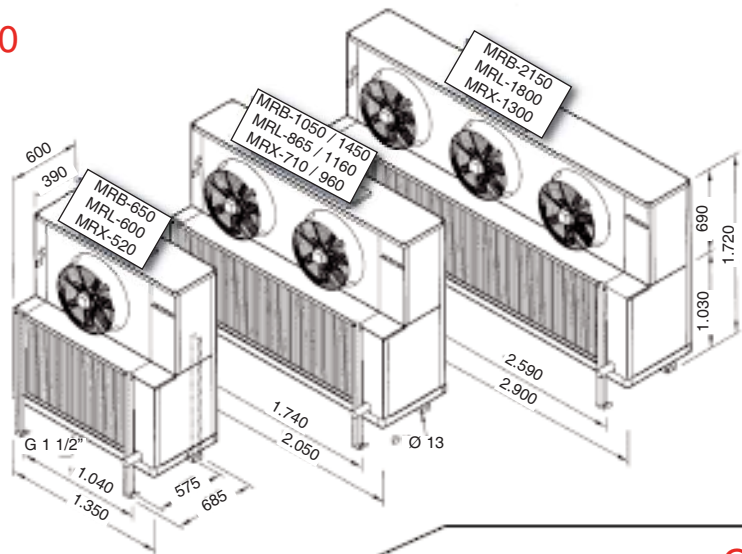

Ø 710

Ø 630

